

brand-new



## BLS Level Sensor

- for many applications
- easy to use
- easy to install
- maintenance free

## BLS Level Sensor – smart and innovative



### The BLS Level Sensor, an innovative product for level detection and monitoring.

- One sensor detects different media (liquids, bulk goods, foams: sticky, pasty or high or low viscosity)
- Maximum temperature stability and repeat accuracy
- Resistant to shocks and vibrations
- Response time < 100 ms
- Fully integrated electronics
- Maintenance free
- Small and good looking design
- LED switching point indicator
- Factory setting for DK (€)  $\geq 2.5$

### One sensor for many applications in different industries:

- Pharmaceutical
- Laboratory
- Food & beverage
- Watermanagement
- Railway and vehicle construction
- Machinery and apparatus engineering
- Plant construction
- Chemical and petrochemical industry
- Shipbuilding




# BLS Level Sensor – technical data



Type	BLS 10	BLS 11	BLS 20	BLS 30 <sup>1)</sup>
Process connection	G 1/2"	G 1/2"	G 1/2"	G 1/2"
Process temperature	-40 to +115 °C	-40 to +115 °C	-40 to +115 °C	-40 to +115 °C
Ambient temperature	-40 to +85 °C	-40 to +85 °C	-40 to +70 °C	-40 to +85 °C
Max. process pressure	100 bar	100 bar	100 bar	100 bar
Electrical connection	Connector M12	Connector M12	Cable 5 m	Connector M12
Power supply	12...30 VDC, 35 mA max.	12...30 VDC, 35 mA max.	12...30 VDC, 35 mA max.	12...30 VDC, 35 mA max.
Enclosure	IP67	IP67	IP67	IP67
Output configuration	PNP	PNP	PNP	PNP
Housing material	1.4404 / ASI 316L	1.4301 / ASI 304	1.4404 / ASI 316L	1.4404 / ASI 316L
DNV Approval	x	x	x	x
ATEX Approval				Ex ia IIC T5, ATEX II 1G (Gas)

<sup>1)</sup> Isolation module on demand

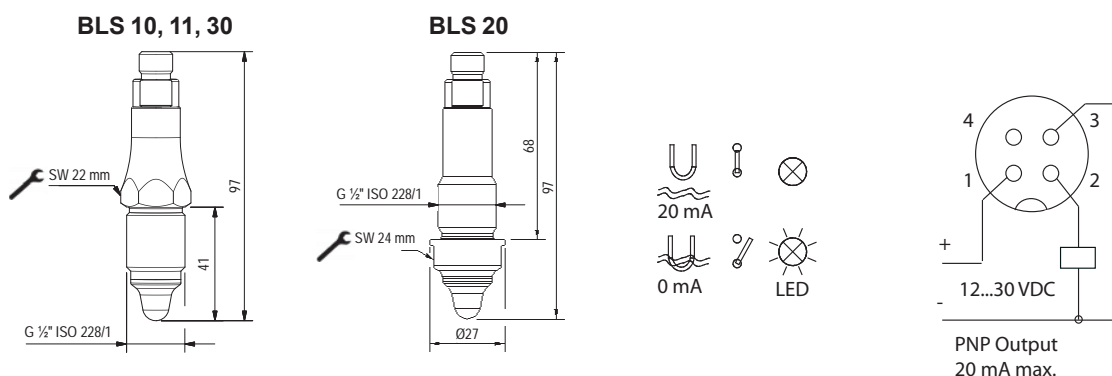



The tip of the sensor is made of PEEK plastic. The sensor works on the principle of frequency-sweep technology. The sensor output can be switched from digital to pulse width modulation (PWM). The sensor recognizes different media and can therefore be used for media separation. The analysis of the PWM signal must be done in the connected control unit (PLC).

# BLS Level Sensor

## Typical applications

- Level detection for storage tanks, containers and pipelines.
- Detection of different media.
- Protecting pumps from running dry.

BLS Level Sensor for DK-values ( $\epsilon$ )  $\geq 2.5$   
i.e. for almost all liquids ok, but also for  
bulk goods, foams, sticky, pasty or high or  
low viscosity.

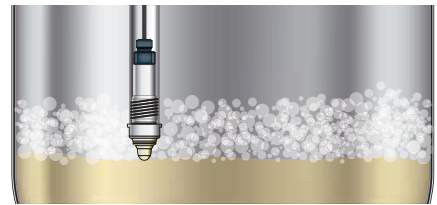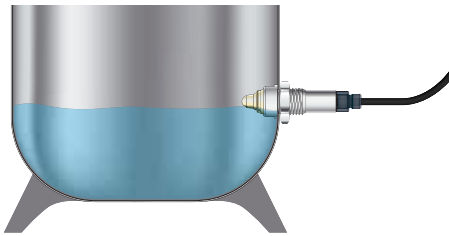

### Pharmaceutical / Laboratory:

- Liquids
- Cream and paste
- Powder
- Granules
- Pills

### Food and beverage industry:

- Water
- Milk products
- Beer
- Yogurt
- Coffee beans
- Liquid chocolate
- Edible oil
- Sauces

### Industry / Petrochemical:

- Water
- Waste water
- Oil
- Ammonia
- Methanol

## Approvals

- ATEX
- DNV Marine Approval
- FDA (on demand)



# BESTA

**Besta Ltd.**

Ackerstrasse 45, CH-8610 Uster, Switzerland  
Phone +41 43 399 15 15, [info@besta.ch](mailto:info@besta.ch), [www.besta.ch](http://www.besta.ch)

LBXEN01310



**Control Components Pty Ltd**

Ph: +61 2 9542 8977

Fx: +61 2 9542 7978

Em: [help@ccezy.com.au](mailto:help@ccezy.com.au)

Web: [www.ccezy.com.au](http://www.ccezy.com.au)

Your Besta distributor

[www.besta.ch](http://www.besta.ch)