


### FLOAT DIMENSIONS



### PROCESS CAPABILITIES

- STAINLESS STEEL CONSTRUCTION
- NO or NC CONTACT RATED AT 250V AC / DC @ 500mA RESISTIVE LOAD
- UP TO 5 FLOATS PER ASSEMBLY MAXIMUM LENGTH 1800mm
- INDIVIDUAL OR COMMON CIRCUIT WIRING
- SPECIAL THREADS AND LENGTHS AVAILABLE
- SPECIFIC GRAVITY 0.8
- TEMPERATURE RATING 120°C MAXIMUM
- PRESSURE RATING :10 kg/cm<sup>2</sup> MAXIMUM
- SCREW IN MULTI -LEVEL ASSEMBLY
- 29mm DIAMETER 304 STAINLESS STEEL FLOAT

### Control Components Pty Ltd

#### CONDITIONS


THIS DRAWING IS OUR EXCLUSIVE PROPERTY AND MUST NOT BE COPIED OR HANDED TO ANY OTHER PARTIES WITH OUT WRITTEN PERMISSION. IT SHALL BE RETURNED UPON REQUEST

PO Box 212 Caringbah NSW 1495  
 PHONE : (02) 9542 8977 FAX : (02) 9542 7978


EMAIL : HELP@controlcomponents.com.au

TITLE

SIZE : A4	DATE :19/04/01	DWG NO :SD 096
SCALE : NTS	DRAWING BY R.M	REV : 00

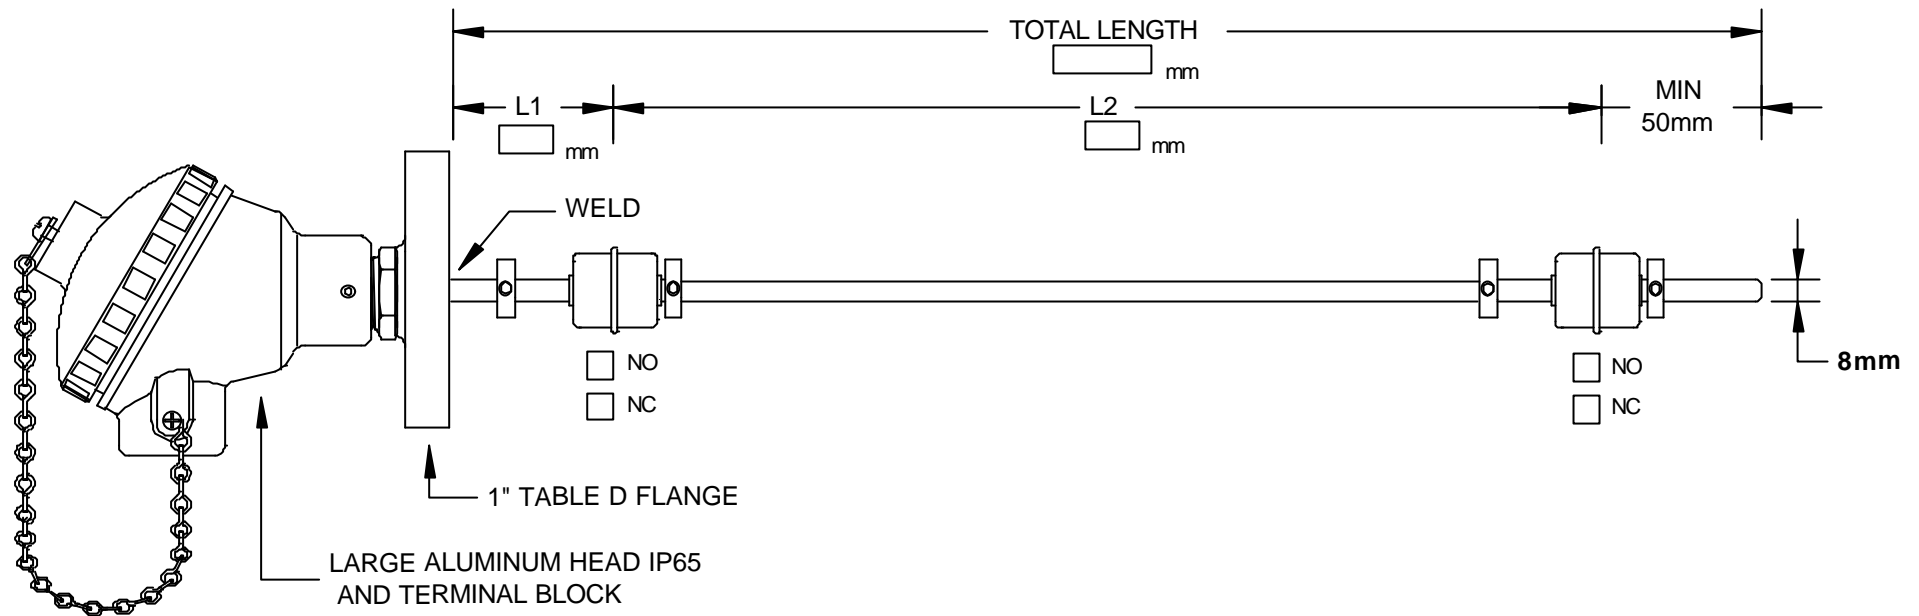

### FLOAT DIMENSIONS



### PROCESS CAPABILITIES

- STAINLESS STEEL CONSTRUCTION
- NO or NC CONTACT RATED AT 250V AC / DC @ 500mA RESISTIVE LOAD
- UP TO 5 FLOATS PER ASSEMBLY MAXIMUM LENGTH 1800mm
- INDIVIDUAL OR COMMON CIRCUIT WIRING
- SPECIAL THREADS AND LENGTHS AVAILABLE
- SPECIFIC GRAVITY 0.8
- TEMPERATURE RATING 120°C MAXIMUM
- PRESSURE RATING :10 kg/cm<sup>2</sup> MAXIMUM
- FLANGE MOUNT MULTI-LEVEL ASSEMBLY
- 29mm DIAMETER 304 STAINLESS STEEL FLOAT

### Control Components Pty Ltd

#### CONDITIONS


THIS DRAWING IS OUR EXCLUSIVE PROPERTY AND MUST NOT BE COPIED OR HANDED TO ANY OTHER PARTIES WITH OUT WRITTEN PERMISSION. IT SHALL BE RETURNED UPON REQUEST

PO Box 212 Caringbah NSW 1495  
 PHONE : (02) 9542 8977 FAX : (02) 9542 7978


EMAIL : HELP@controlcomponents.com.au

TITLE

SIZE : A4	DATE :19/04/01	DWG NO :SD 097
SCALE : NTS	DRAWING BY R.M	REV : 00

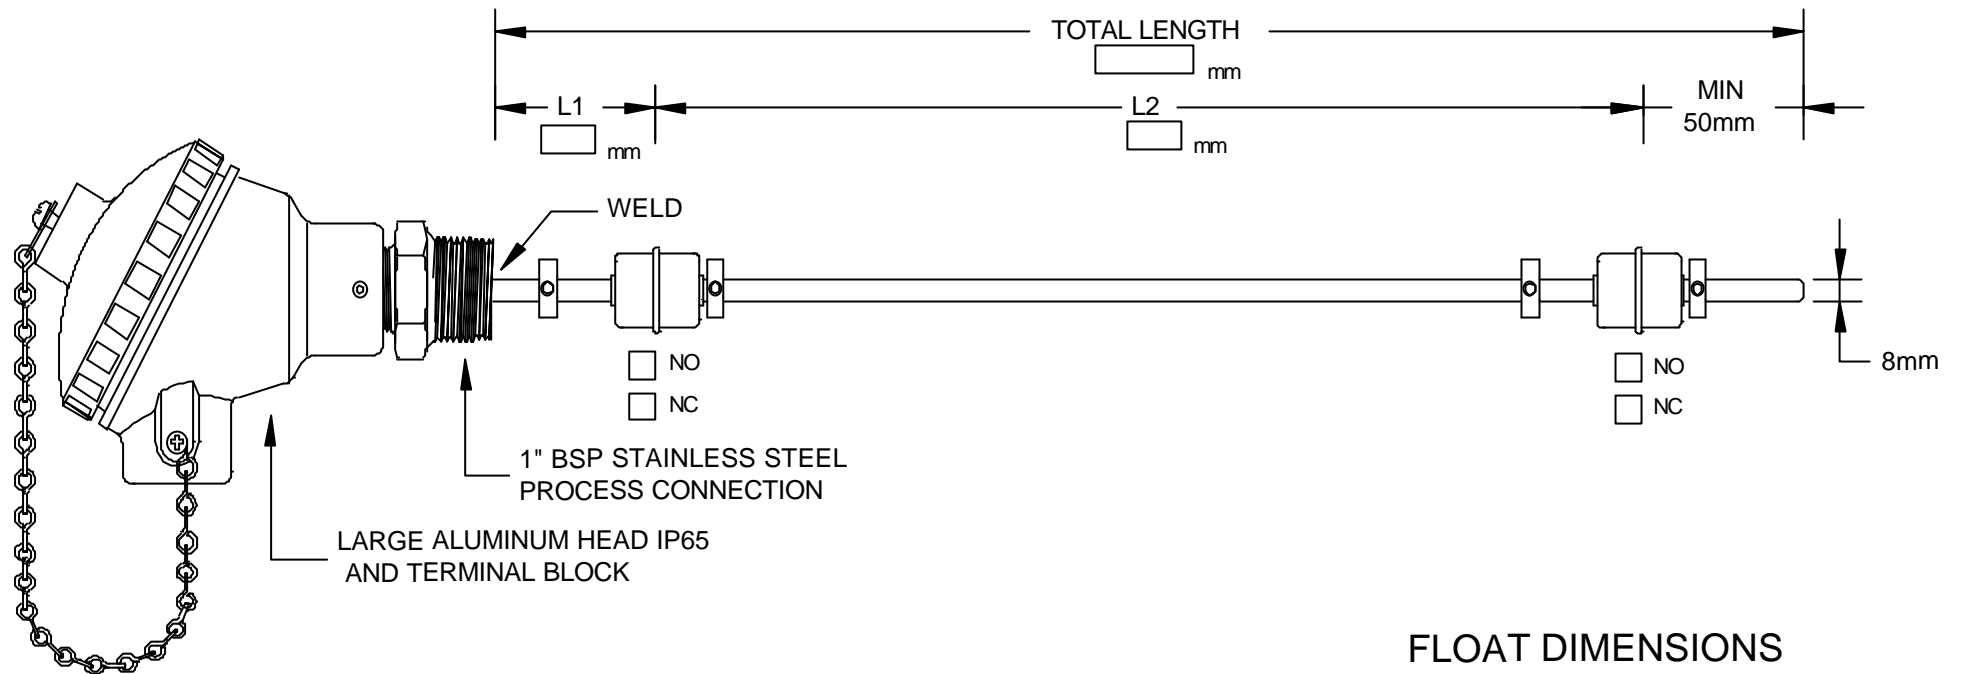

### FLOAT DIMENSIONS



### PROCESS CAPABILITIES

- STAINLESS STEEL CONSTRUCTION
- NO or NC CONTACT RATED AT 250V AC / DC @ 500mA RESISTIVE LOAD
- UP TO 5 FLOATS PER ASSEMBLY MAXIMUM LENGTH 1800mm
- INDIVIDUAL OR COMMON CIRCUIT WIRING
- SPECIAL THREADS AND LENGTHS AVAILABLE
- SPECIFIC GRAVITY 0.8
- TEMPERATURE RATING 120°C MAXIMUM
- PRESSURE RATING :10 kg/cm<sup>2</sup> MAXIMUM
- SCREW IN MULTI -LEVEL ASSEMBLY
- 29mm DIAMETER 304 STAINLESS STEEL FLOAT

### Control Components Pty Ltd

#### CONDITIONS

THIS DRAWING IS OUR EXCLUSIVE PROPERTY AND MUST NOT BE COPIED OR HANDED TO ANY OTHER PARTIES WITH OUT WRITTEN PERMISSION. IT SHALL BE RETURNED UPON REQUEST

PO Box 212 Caringbah NSW 1495  
 PHONE : (02) 9542 8977 FAX : (02) 9542 7978

EMAIL : [HELP@controlcomponents.com.au](mailto:HELP@controlcomponents.com.au)

TITLE

SIZE : A4	DATE :12/04/01	DWG NO :SD 132
SCALE : NTS	DRAWING BY R.M	REV : 00