

Unique Features Make These LS-3 Models Special

These small switches feature unique configurations for special applications.

Part No. 142545
With Slosh Shield



Cut-away version shown

Compact, all-polypropylene switch with slosh shield is ideal for use with turbulent liquids in small tanks. FDA approved materials.

Part No. 46999
Bottle Level




For external mounting on tanks too small to accommodate internally mounted switches. (See note below)

Part No. 76707
For Low Level



For detecting levels as low as 5/8" from tank bottom. Use in water, gasoline, some oils and chemicals.

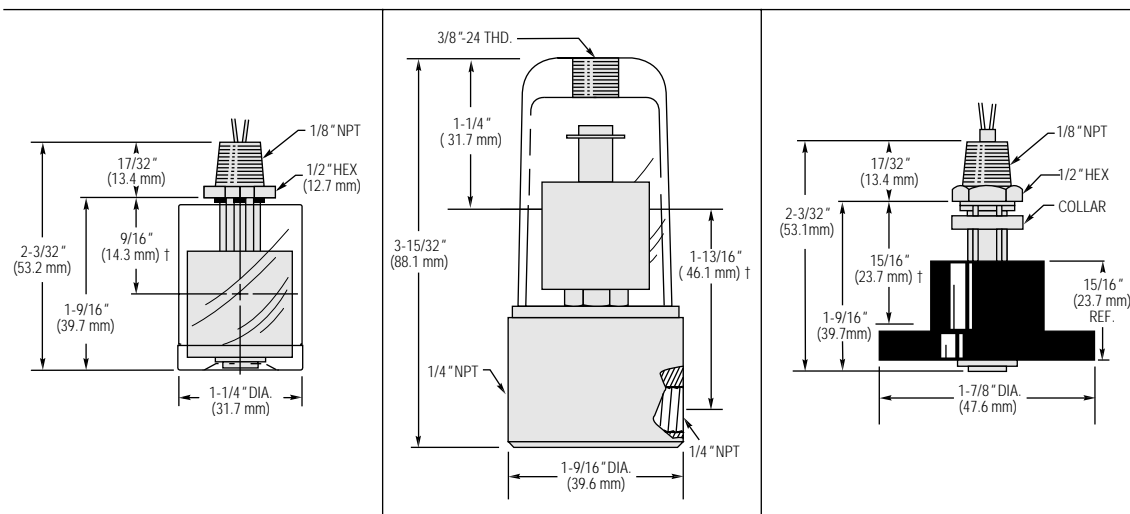

Order By Part Number	142545 ⚡	46999 ⚡	76707 ⚡
Materials			
Stem and Mounting	All Polypropylene (Including Shield††)	Polysulfone	All Polysulfone (Including Collar)
Float	Polypropylene (Solid)	Polysulfone	Buna N
Other Wetted	—	Brass, Aluminum, Polycarbonate, Viton A	Epoxy
Min. Liquid Sp. Gr.	.90	.75	—
Operating Temperature	-40°F to +150°F (-40°C to +65.6°C)	-40°F to +120°F (-40°C to +48.9°C)	-40°F to +180°F (-40°C to +82.2°C)
Pressure, PSI, Max. ***	150	50	
Switch*, SPST	20 VA, N.C./N.O./Dry**	20 VA, N.C. Dry	
Electrical Termination	No. 22 AWG, 22" L., PVC Lead Wires	No. 22 AWG, 72" L.; Polymeric Lead Wires	No. 22 AWG, 72" L., PVC Lead Wires

* See "Electrical Data" on Page A-4 for more information.

** Switch operation is selectable, N.O. or N.C., by inverting the float on the unit stem.

*** Maximum pressure at 70°F (30°C).

† L₁ = Switch actuation level, nominal (based on a specific gravity of 1.0).

†† Consult factory for other available materials.

⚡ - Stock Items.

Note: LS-3 Series Bottle Level Switch is also available with any of the float materials shown on opposite page. Contact GEMS for correct part number.