


# Solenoid valve

## for relay-controlled airblast cleaning in TriBox Mini

The TriBox Mini supports operation with an external controllable pneumatic valve. All settings for the solenoid valve can be adjusted by the TriBox Mini menu ("Measurement & Cleaning ..."). It can be easily installed next to the TriBox Mini. It features four 5.3 mm installation holes.

Available configuration options:

- activity
- interval
- duration
- pause before measurement

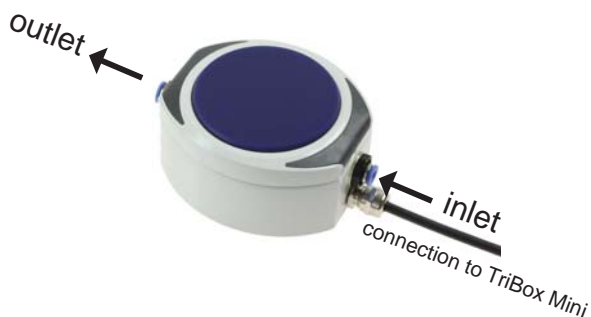

### Key features

size: 110 x 97 x 55 mm
weight: 0.6 kg
max. pressure: 6 bar
connection for 4/6 mm hoses
housing: IP65, die-cast aluminium alloy
connection cable to TriBox Mini of 1 m length
temperature range: 0 - 40°C
connection for 4/6 mm hoses